




# ACO Showerdrain Q Plus Point shower drains

## Installation Guide




### 1. Shower Point Drain Placement

The placement of the Q Plus Point shower drain should be ideally at the end wall or at the center of the shower.

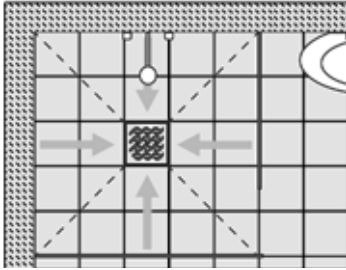

Installation in center

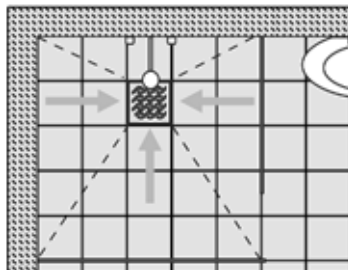


Installation at wall

### 2. Locate Pipework

Re-locate rough-in pipework, if necessary, bring to desired location of point drain.


### 3. Install Drain Flange

Install 50mm (2") PVC threaded drain flange with preferred method to the rough-in pipe. Place base mortar graded 2% towards drain.

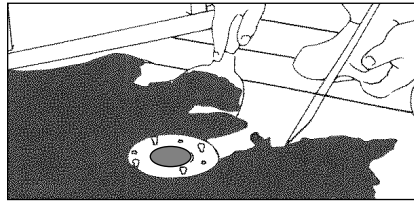


### 4. Waterproof Floor

Install waterproofing membrane over floor and cut to size. Cut out an area for drain flange opening and secure membrane in place over drain flange with membrane clamp. Seal membrane to drain flange base, but not to compression ring.

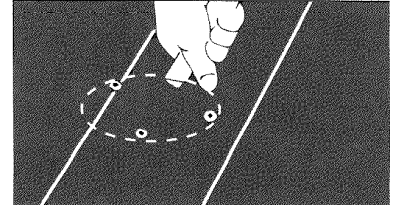


### 5. Install Coupling

Thread the 50mm (2") coupling (included) into standard 50mm (2") shower drain flange. Hand tighten. Do not seal to membrane.

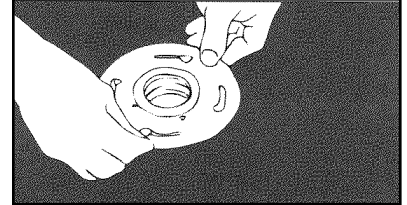


### 6. Insert Point Drain

Coat exterior of drain channel outlet with ABS solvent cement and insert into 50mm (2") coupling. Push point drain down to correct height. Note: top of point drain should be flush with surface of finished floor.

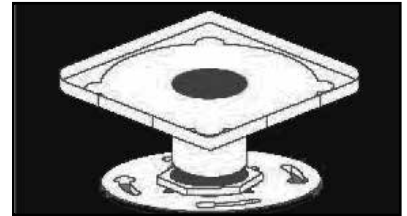

### Exploded view of the typical point drain components

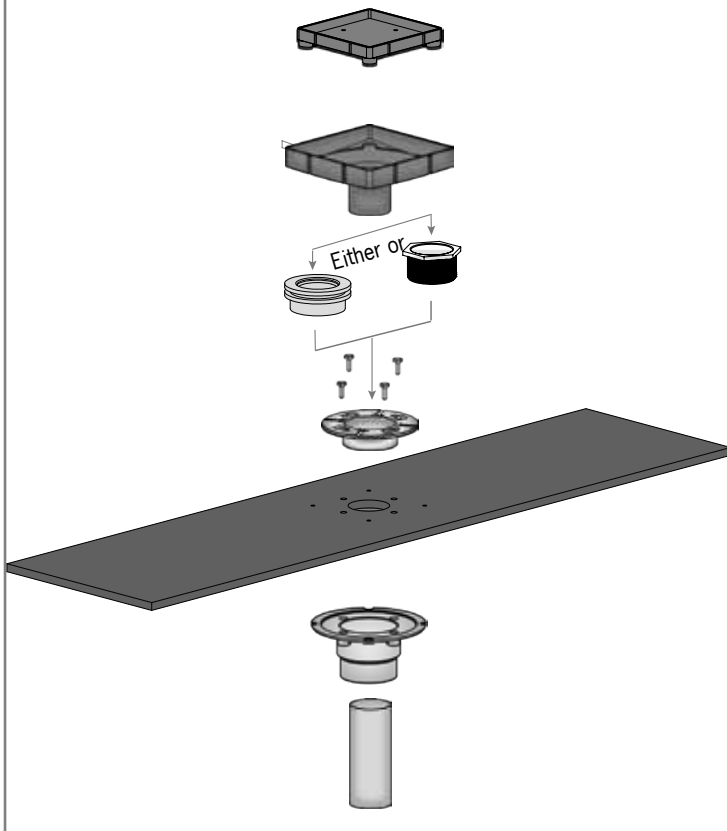

### 7. Mortar Bed

Place mortar bed on top of membrane allowing space for tiles and thin set. Let cure.

### 8. Flooring

Complete the installation of the point shower drain by installing tiles on thin set or any other preferred flooring.

#### ACO Canada

1-2880 Brighton Rd.  
Oakville, ON L6H 5S3  
Tel: (905) 829-0665  
Fax: (905) 829-2908  
acocan.ca

#### Contact électronique

info@acocan.ca  
acoshowerdrain.ca

